

A cross-sectional view of a mechanical assembly. The assembly consists of a main body (1) with a central cavity. Inside this cavity, there is a component (2) with a central protrusion (3) that fits into a corresponding hole (4) in a lower plate (5). A component (6) is positioned above the protrusion (3), and a component (7) is positioned below it. The entire assembly is supported by a base (8) on the right side.



Ho. K. KIM.
09/901,487

FIG. 4

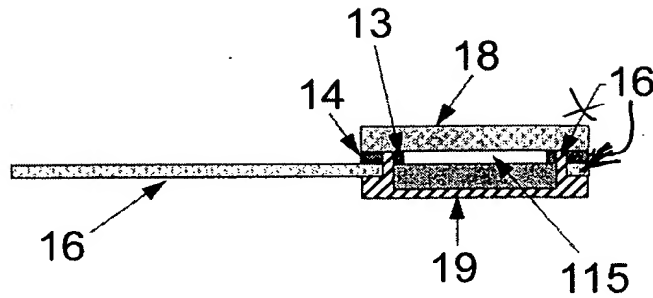


FIG. 5

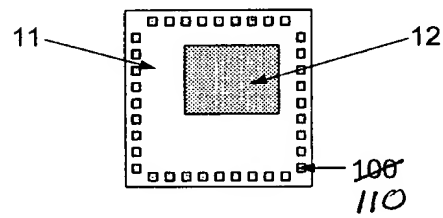


FIG. 6

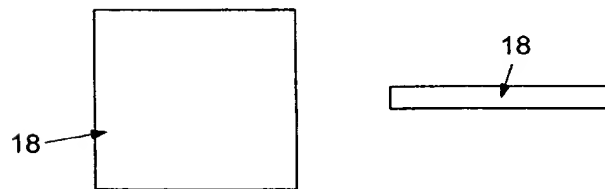




FIG. 10




FIG. 11


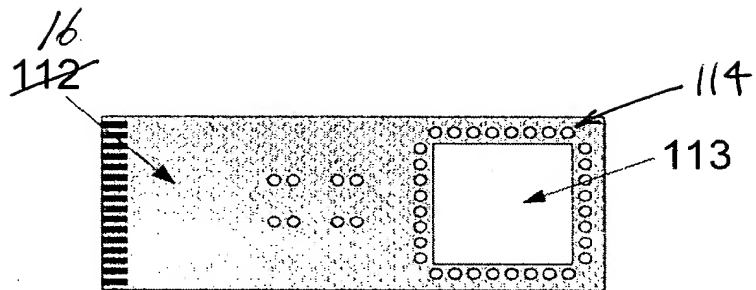


FIG. 12



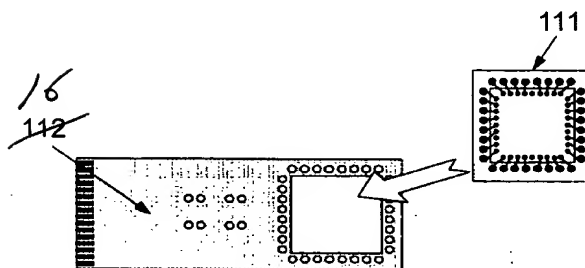

Ho. K. KIM.
09/901,487

FIG. 13

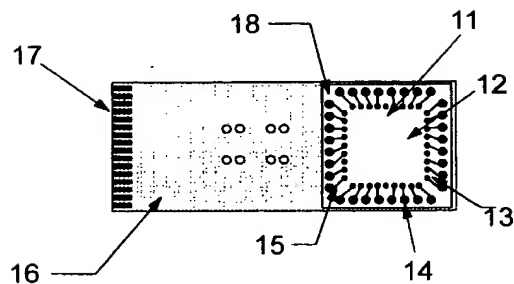


FIG. 14



FIG. 15

